


Seville®


Seating Capacity	5 Adults	
Dimensions	84" x 78" x 30 1/2", (213 cm x 198 cm x 78 cm)	
Corner Radius	16" (41 cm)	
Dry Weight	670 lbs (329 kg)	
Filled Weight (Average Fill)	2,840 lbs (1,288 kg)	
Water Capacity (Average Fill)	260 US gallons (985 Liters)	
Shipping Weight	670 lbs (304 kg)	
Export Shipping Weight:	720 lbs (327 kg)	
Electronic Controls	D1 Hub™ LCD full color control panel; access to control jets, temperature, settings and maintenance schedule	
Pump 1	North America (60 Hz): 2-Speed, 4.0 HP break, 2.5 HP continuous, 48 Frame	
Export (50 Hz):	1-Speed, 2.0 HP continuous	
Circulation Pump	Yes	
Fountain Pump	Yes	
Filtration (factory default)	24/7 Filtration (Purge Cycles 2 x 10 minutes)	
Total VCR Jets	40	
Seat 1 Jets	1 Pillow Mini Rotator, 2 Cluster Shower Directional, 2 Mini Storm Rotator, 8 Mini Storm Directional, 2 Euro Cluster Storm Directional	
Seat 2 Jets	2 Mini Storm Directional	
Seat 3 Jets	5 Euro Cluster Storm Rotator, 4 Euro Cluster Storm Directional	
Seat 4 Jets	6 Euro Cluster Storm Directional	
Seat 5 Jets	2 Mini Storm Directional, 2 Power Storm Rotator	
Seat 6 Jets	2 Euro Cluster Storm Rotator	
Footwell (7)	2 Mini Storm Directional	
Massage Selectors	1	
Special Features	Tactile Therapy, Spa Status Light, 1 Flex Therapy Pillow	
Water Management System	UltraPure System; Two 75 ft filter cartridge; 8" Weir	
LED Lighting	Liquid FX	
Optional	Exterior Lights	
Synthetic Cabinet Colors	Adobe Tan, Stoneridge Grey, Mayan Brown	
Terracina Cabinet (Optional)	Driftwood, Cherry, Summer Pine, Vintage Cedar, Midnight Maple	
Acrylic Colors	Moonstone, UltraLife, Sand, Sunstone, Smoked Marble, Blue Topaz, Gray Marble, Desert Stone	
Headrests	2 (1 Standard, 1 Flex Therapy Pillow)	
Water Feature	Fountain with independent flow rate (on or off) adjustment; powered by the fountain pump	
Heater	2.1, 3.4, 5.5 kW	
Export (50Hz)	2.1, 3.4, 5.5 kW	
Electrical Requirements:	North America (60 Hz): 240 VAC@30A, 40A or 50A Export (50 Hz): 230 VAC@1x16A, 1x32A, 2x16A, 3x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs	
Warranty*	North America (60 Hz): Lifetime for UltraLife Shell Surface, 7 Years Acrylic Shell Surface, 5 Years Plumbing, 5 Years Equipment and Controls, Lifetime for EnviroTect Cabinet, 7 Years for Terracina Cabinet, 1 Year Water Purification System, 2 Years for Jet Insert, 1 Year for Jet Escutcheon, 2 Years Lights, 1 Year Stereo; Export (50 Hz): 10 Years for UltraLife Shell Surface, 7 Years Acrylic Shell Surface, 5 Years Plumbing, 5 Years Equipment and Controls, 5 Years for EnviroTect Cabinet, 2 Years for Terracina Cabinet, 1 Year Water Purification System, 2 Years for Jet Insert, 1 Year for Jet Escutcheon, 2 Years Lights, 1 Year Stereo	
Audio System (Optional)	Fully Integrated Stereo System with Bluetooth capability, 4 premium speakers and a subwoofer	
Wi-Fi (Optional)	D1 Connect App	

**Optional
escutcheon jets**

*(See Warranty Document for Specific Details)

Seville

Massage Selector Diagram

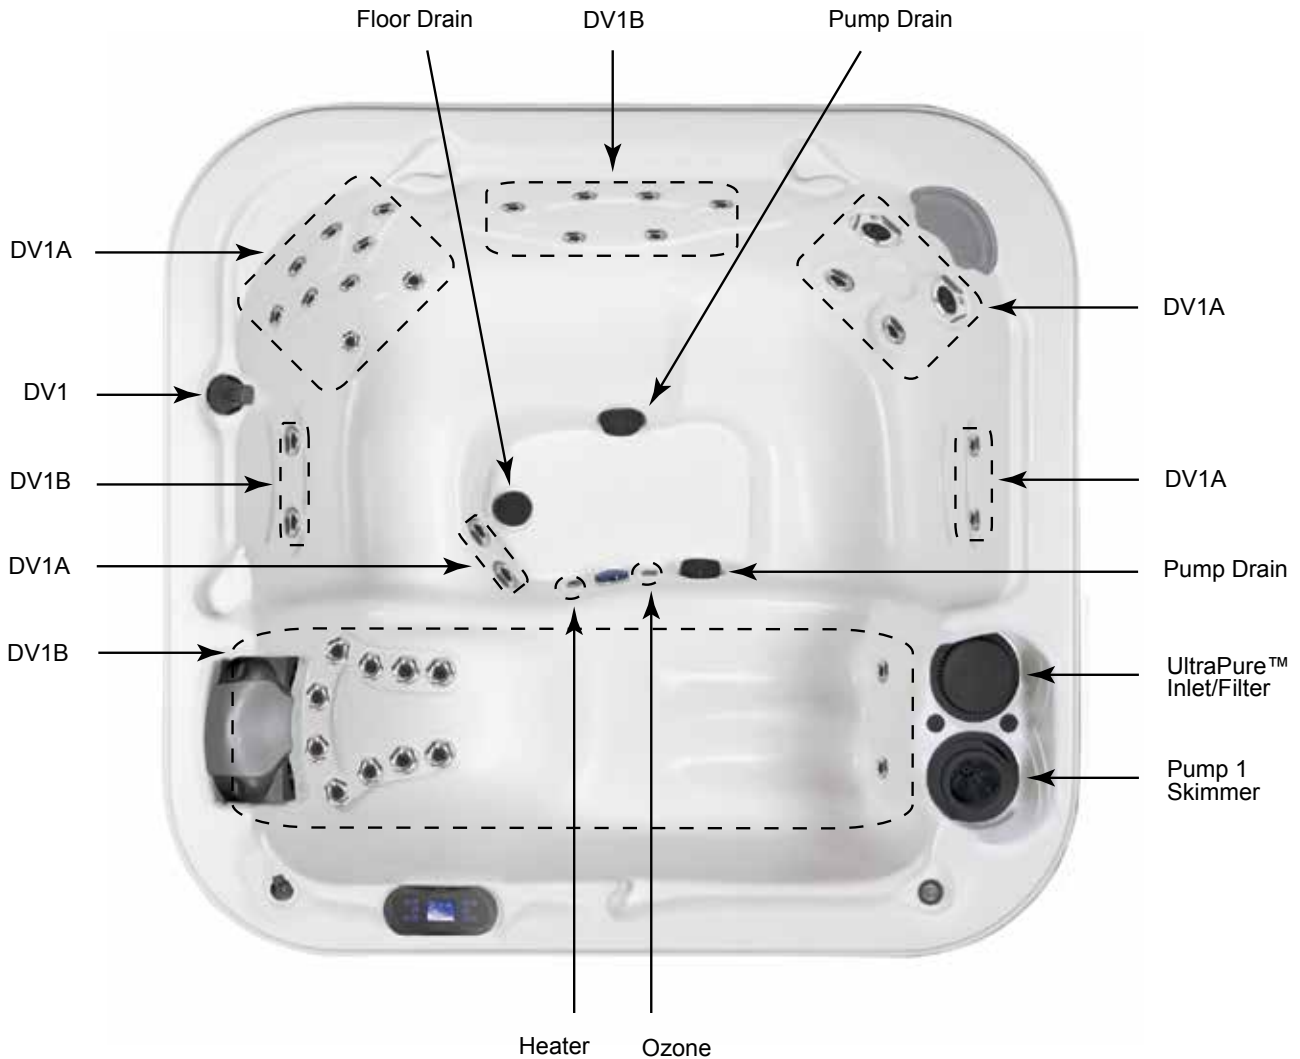

DV1 A = Diverter Valve 1 (A position Clockwise)
 DV1 B = Diverter Valve 1 (B Position Counter Clockwise)
 DV1 C = Diverter Valve 1 (Neutral Position)

Spa Operation Subject to Change without Notice

Seat Depths

- 1 = 24.00" (60.96 cm)
- 2 = 23.50" (59.69 cm)
- 3 = 23.50" (59.69 cm)
- 4 = 24.00" (60.96 cm)
- 5 = 26.00" (66.04 cm)
- 6 = 26.00" (66.04 cm)

7 = 26.50" (67.31 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance ± 0.5"** (1.27 cm).



Dimensions/Specifications are Subject to Change Without Notice

Seville

Jet Designation

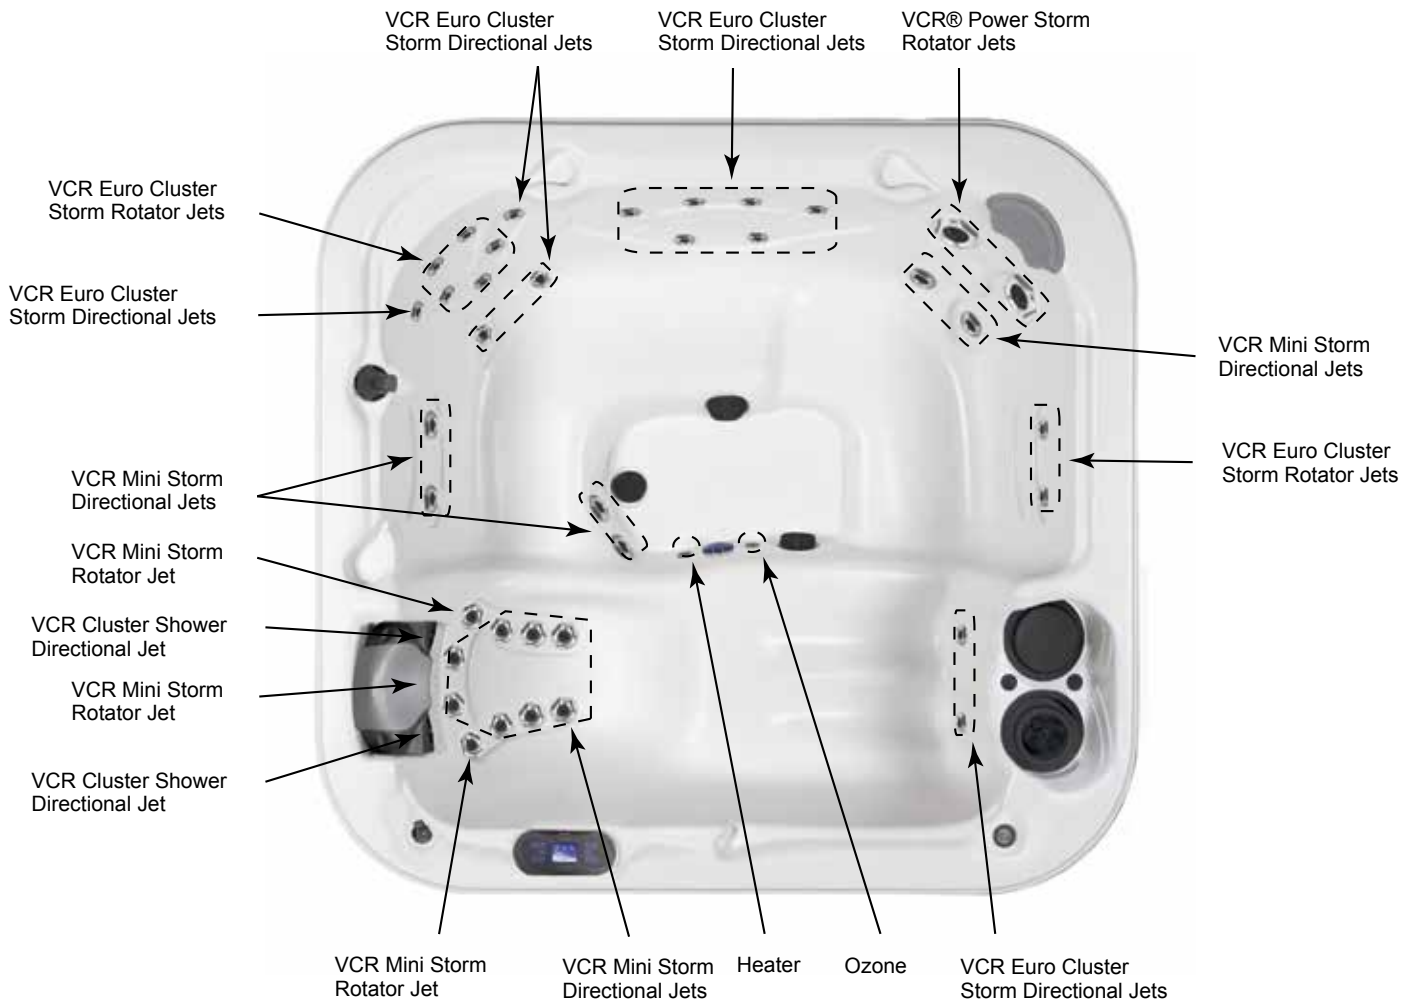

Dimensions/Operation/Specifications are Subject to Change Without Notice

40 Total Jets

Total Jets



Mini Storm Rotator (2)



Mini Storm Directional (14)



Cluster Storm Directional (13)




Cluster Storm Dual Rotator (6)



Power Storm Rotator (2)



Flex Therapy Pillow (1)







Cluster Shower Directional (2)



Mini Storm Rotator (1)


Seville

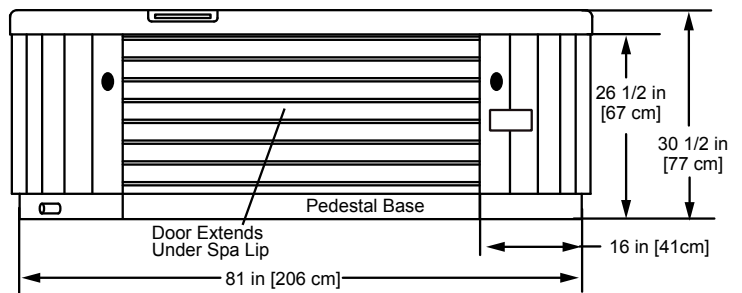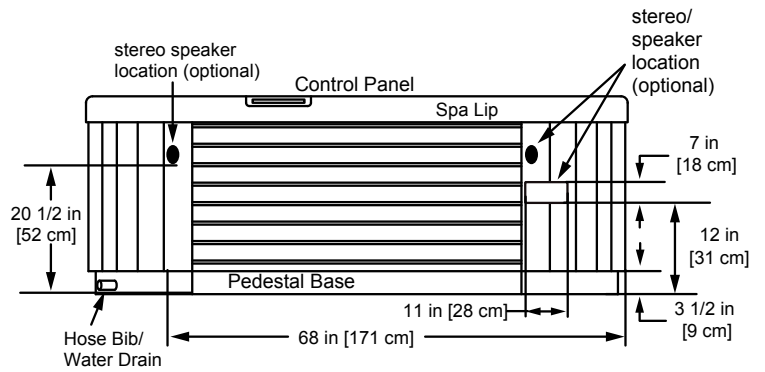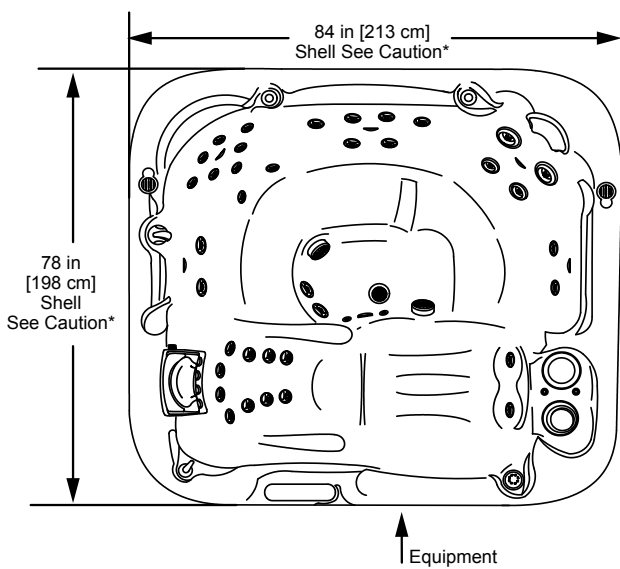



STOP

***Caution:**
 Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawing above. **If site planning is critical to such tolerances, be sure to measure your actual spa.**

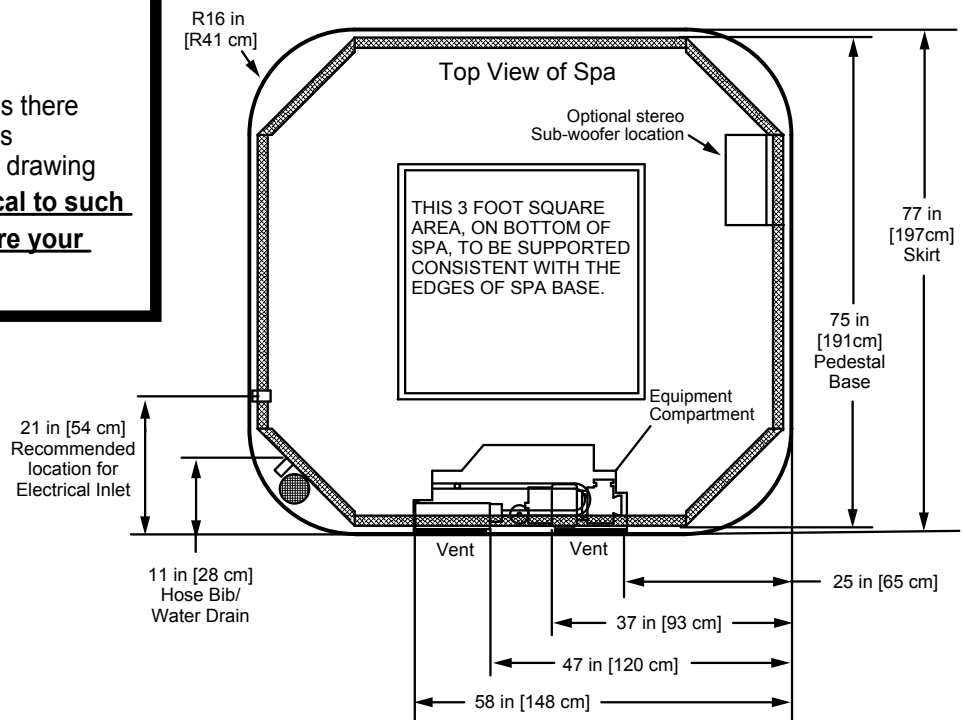

- Note:
1. Subject to change without notice.
 2. Engineering specs may differ slightly from brochure.
 3. For E-Z lifter installation allow 18" (45.72 cm) clearances on the backside of the spa.
 4. Alternative cabinets may add significant weight. Ask your dealer for exact details.

Dimensions/Specifications are Subject to Change Without Notice (Tolerance ± 0.5" [1.27 cm]).