

Californian™

Seating Capacity.....	6 Adults	
Dimensions	92" x 92" x 35 1/2", (234 cm x 234 cm x 90 cm)	
Corner Radius.....	16" (41 cm)	
Dry Weight.....	882 lbs (400 kg)	
Filled Weight (Average Fill)	3,800 lbs (1,723 kg)	
Water Capacity (Average Fill).....	350 US gallons (1,325 Liters)	
Shipping Weight.....	882 lbs (400 kg)	
Export Shipping Weight:.....	932 lbs (423 kg)	
Electronic Controls	D1 SmartHUB™ full color glass touch control panel; access to control jets, temperature, settings and maintenance schedule	
Pump 1.....	North America (60 Hz): 2-Speed, 4.0 HP break, 2.5 HP continuous, 48 Frame	
Export (50 Hz):	1-Speed, 2.0 HP continuous	
Pump 2.....	North America (60 Hz): 1-Speed, 3.6 HP break, 2.5 HP continuous, 48 Frame	
Export (50 Hz):	1-Speed, 2.0 HP continuous	
Circulation Pump.....	Yes	
Fountain Pump	Yes	
Filtration (factory default).....	24/7 Filtration (Purge Cycles 2 x 10 minutes)	
Total VCR Jets	36	
Seat 1 Jets.....	5 Power Storm Multi Port, 6 Mini Storm Rotator, 2 Power Storm Rotator	
Seat 2 Jets.....	4 Mini Storm Rotator	
Seat 3 Jets.....	2 Power Storm Dual Rotator, 1 Mini Storm Rotator, 2 Power Storm Directional	
Seat 4 Jets.....	1 Power Storm Dual Rotator, 2 Mini Storm Rotator	
Seat 5 Jets.....	1 Pillow Mini Storm Rotator, 1 Pillow Cluster Shower Directional, 4 Power Storm Rotator, 2 Power Storm Directional	
Seat 6 Jets.....	1 Power Storm Dual Rotator	
Footwell (7).....	1 Typhoon	
Massage Selectors	1	
Special Features	Tactile Therapy, Spa Status Light, 1 Flex Therapy Pillow, Aux Control	
Water Management System.....	UltraPure System; Two 75 ft filter cartridge; 8" Weir	
LED Lighting	Liquid FX	
Optional	Exterior Lights	
Synthetic Cabinet Colors.....	Adobe Tan, Stoneridge Grey, Mayan Brown	
Terracina Cabinet (Optional).....	Driftwood, Cherry, Summer Pine, Vintage Cedar, Midnight Maple	
Acrylic Colors	Moonstone, UltraLife, Sand, Sunstone, Smoked Marble, Blue Topaz, Gray Marble, Desert Stone	
Headrests	3 (2 standard; 1 Flex Therapy Pillow)	
Water Feature.....	Fountain with independent flow rate (on or off) adjustment; powered by the fountain pump	
Heater	2.1, 3.4, 5.5 kW	
Export (50Hz)	2.1, 3.4, 5.5 kW	
Electrical Requirements:	North America (60 Hz): 240 VAC@30A, 40A or 50A Export (50 Hz): 230 VAC@1x16A, 1x32A, 2x16A, 3x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs	
Warranty*.....	North America (60 Hz): Lifetime for UltraLife Shell Surface, 7 Years Acrylic Shell Surface, 5 Years Plumbing, 5 Years Equipment and Controls, Lifetime for EnviroTect™ Cabinet, 7 Years for Terracina Cabinet, 1 Year Water Purification System, 2 Years for Jet Insert, 1 Year for Jet Escutcheon, 2 Years Lights, 1 Year Stereo; Export (50 Hz): 10 Years for UltraLife Shell Surface, 7 Years Acrylic Shell Surface, 5 Years Plumbing, 5 Years Equipment and Controls, 5 Years for EnviroTect™ Cabinet, 2 Years for Terracina Cabinet, 1 Year Water Purification System, 2 Years for Jet Insert, 1 Year for Jet Escutcheon, 2 Years Lights, 1 Year Stereo	
Audio System (Optional).....	Fully Integrated Stereo System with Bluetooth capability, 4 premium speakers and a subwoofer	
Wi-Fi (Optional).....	D1 Connect App	




**Optional
escutcheon jets**

*(See Warranty Document for Specific Details)

Californian

Massage Selector Diagram

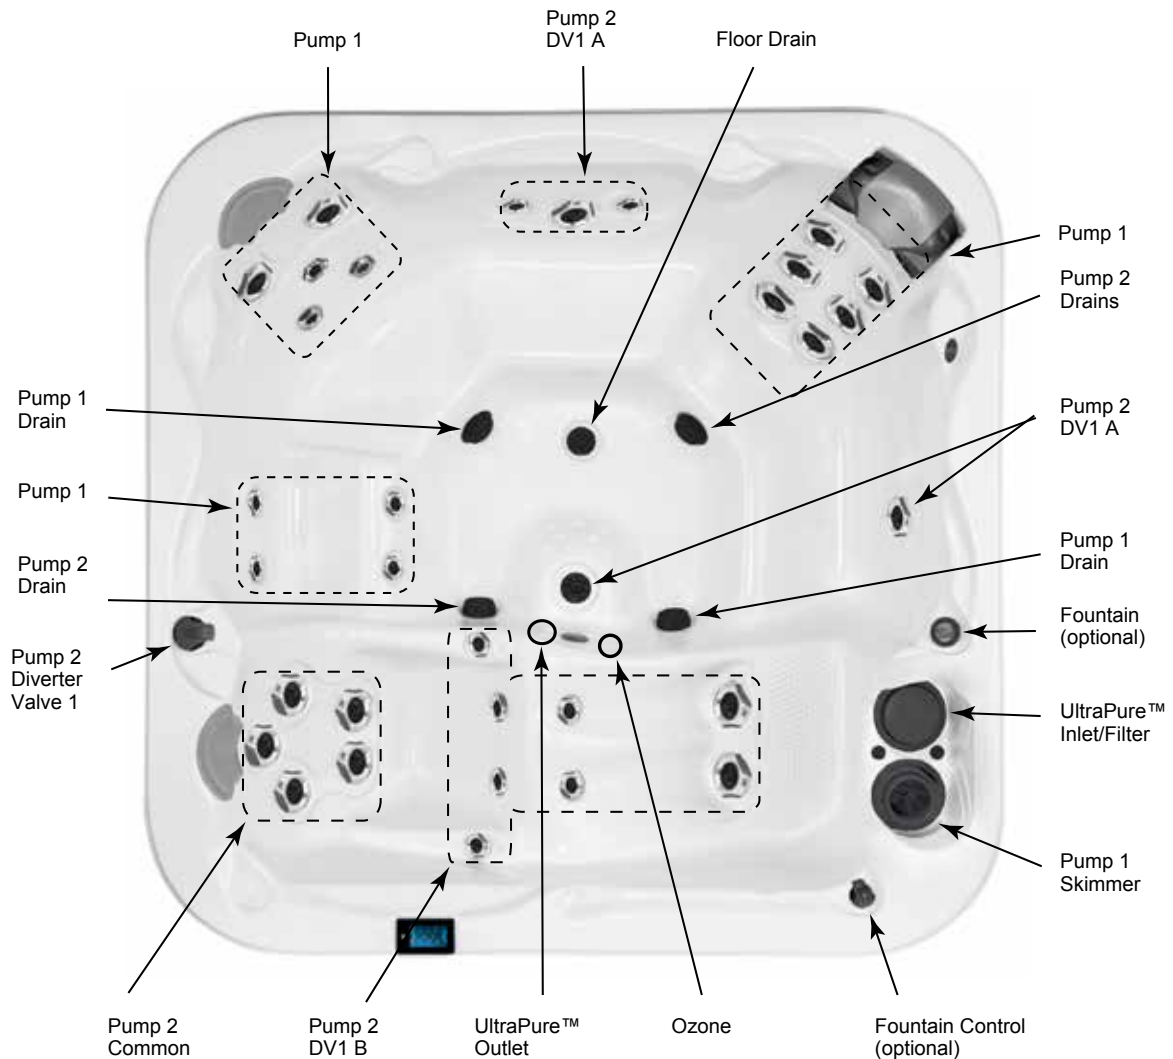

- Legend:
 DV1 A = Diverter Valve 1 (A Position Clockwise)
 DV1 B = Diverter Valve 1 (B Position Counter Clockwise)
 DV1 C = Diverter Valve 1 (Neutral Position)

Spa Operation Subject to Change without Notice

Seat Depths

- 1 = 24.00" (60.96 cm)
- 2 = 20.50" (52.07 cm)
- 3 = 26.50" (67.31 cm)
- 4 = 24.50" (62.23 cm)
- 5 = 29.00" (73.66 cm)
- 6 = 26.00" (66.04 cm)

- 7 = 31.00" (78.74 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance $\pm 0.5"$ (1.27 cm).



Dimensions/Specifications are Subject to Change Without Notice

Californian

Jet Designation

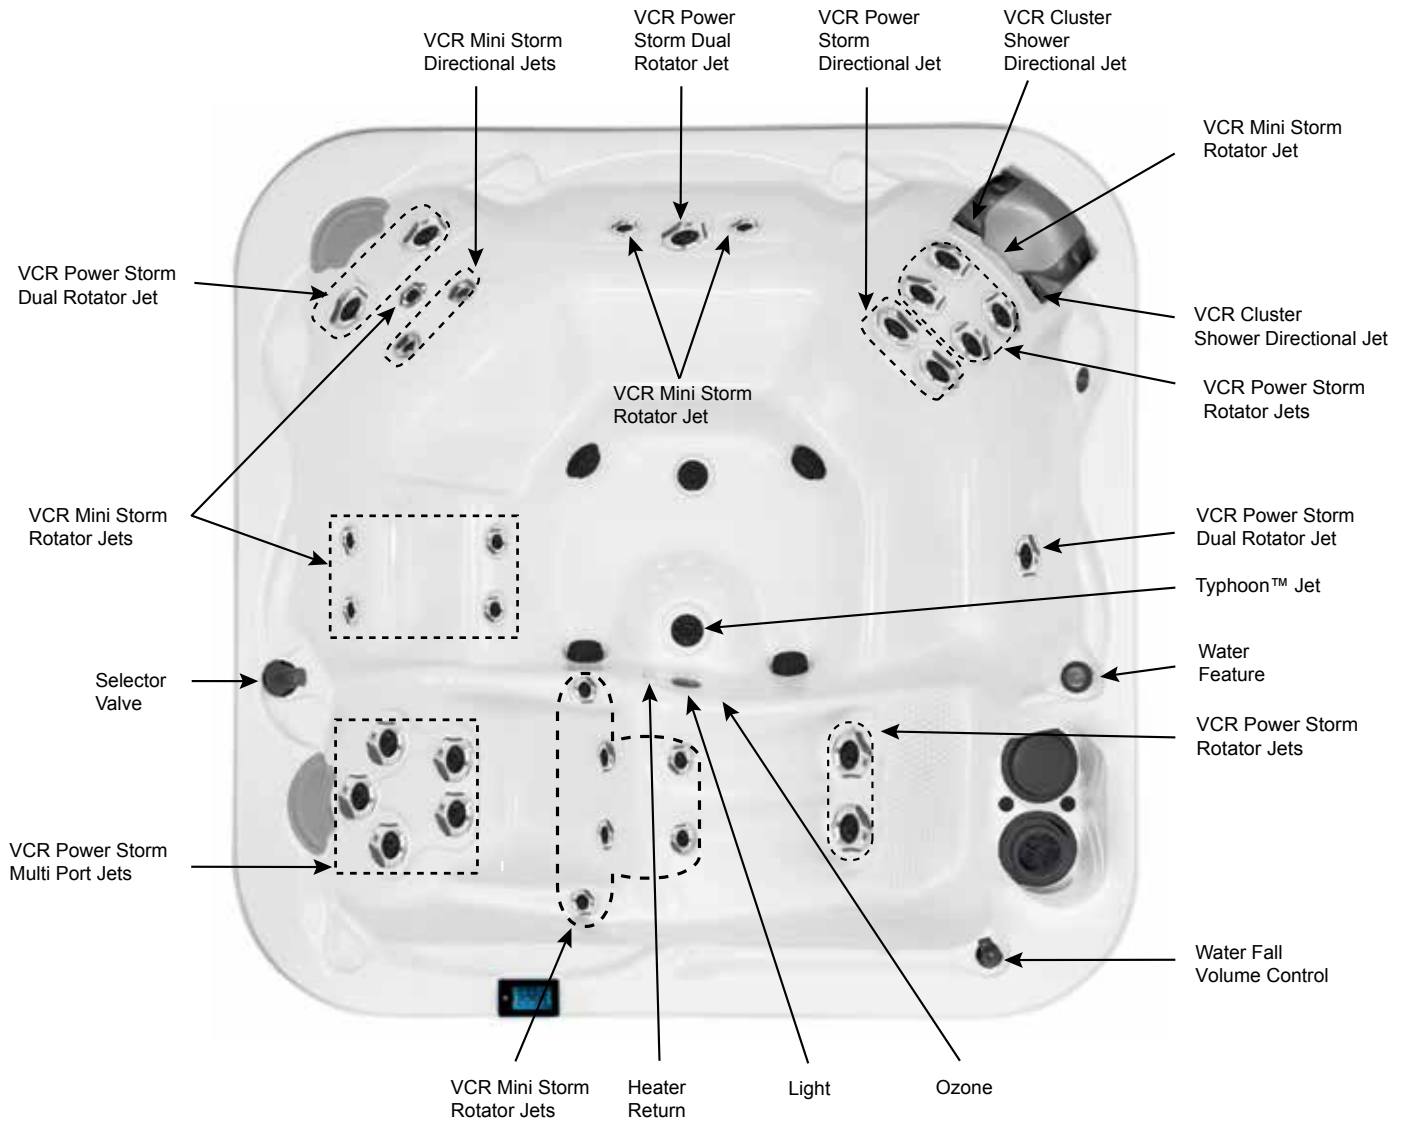




Dimensions/Operation/Specifications are Subject to Change Without Notice

36 Total Jets




Total Jets

Californian

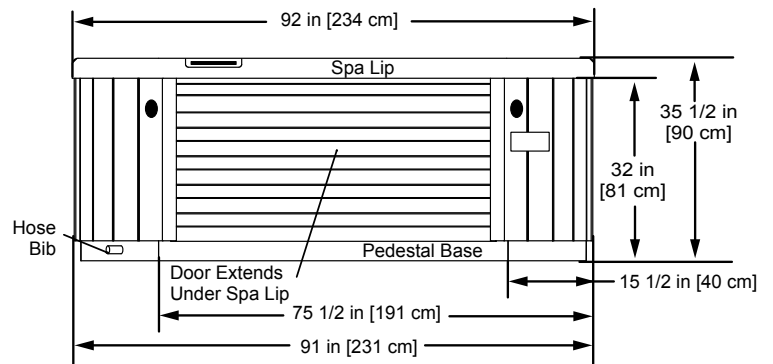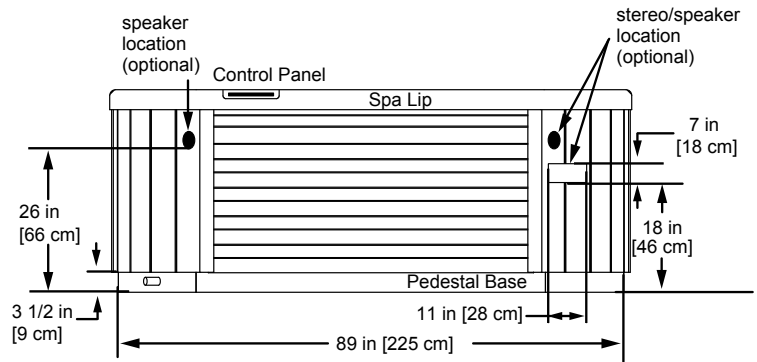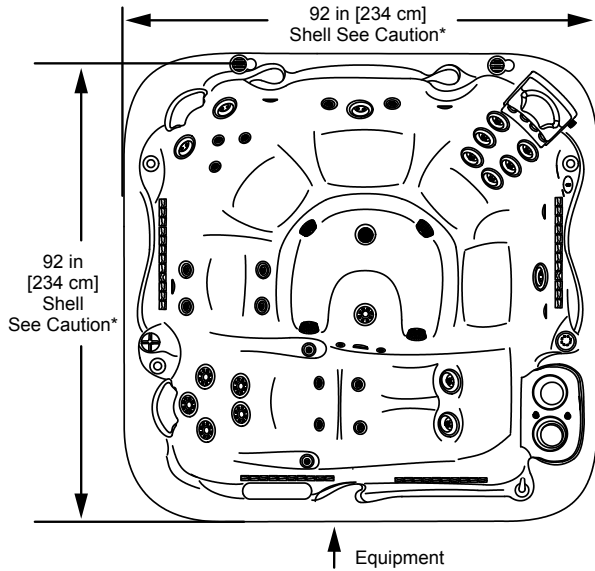

STOP

***Caution:**
Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawing above. **If site planning is critical to such tolerances, be sure to measure your actual spa.**

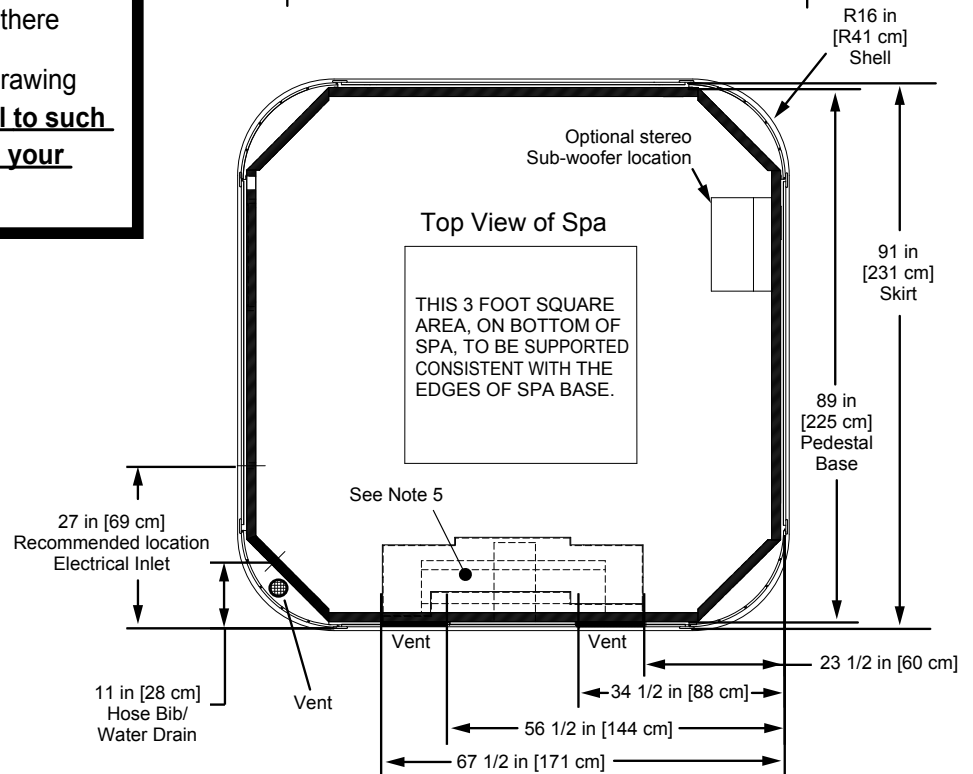

- Note:
1. Subject to change without notice.
 2. Engineering specs may differ slightly from brochure.
 3. For E-Z lifter installation allow 18" (45.7cm) clearances on the backside of the spa.
 4. Alternative cabinets may add significant weight. Ask your dealer for exact details.
 5. This is the approximate location for drilling a hole if you must bring the power line in through the bottom of the spa. Be careful not to puncture a plumbing line inside the equipment compartment (drill from the inside compartment out).

Dimensions/Specifications are Subject to Change Without Notice (Tolerance $\pm 0.5"$ [1.27 cm]).